

BLACKline Torch sets MS/MG/MC 330 (up to 300A)

Properties

- Flexible supply hose
- Bend protection at the plug view
- Gas nozzle with rugged trapezoidal thread
- Optimum gas coverage by recessed contact tip
- Gas reduction by laminar gas flow and design of the tip adapter
- No gas loss due to separate shield gas feed

Application

- Non- and low alloyed steels
- High alloyed steels
- Copper alloys for the MSG brazing
- Small to medium material thicknesses

Technical data (DIN EN 60 974-7):

CO ₂ :	duty cycle
	300A/60%
Mixed gas:	270A/60%
Wire diameter:	1.0 - 1.2 mm




Design with handle type MS



Design with handle type MG



Design with handle type MC

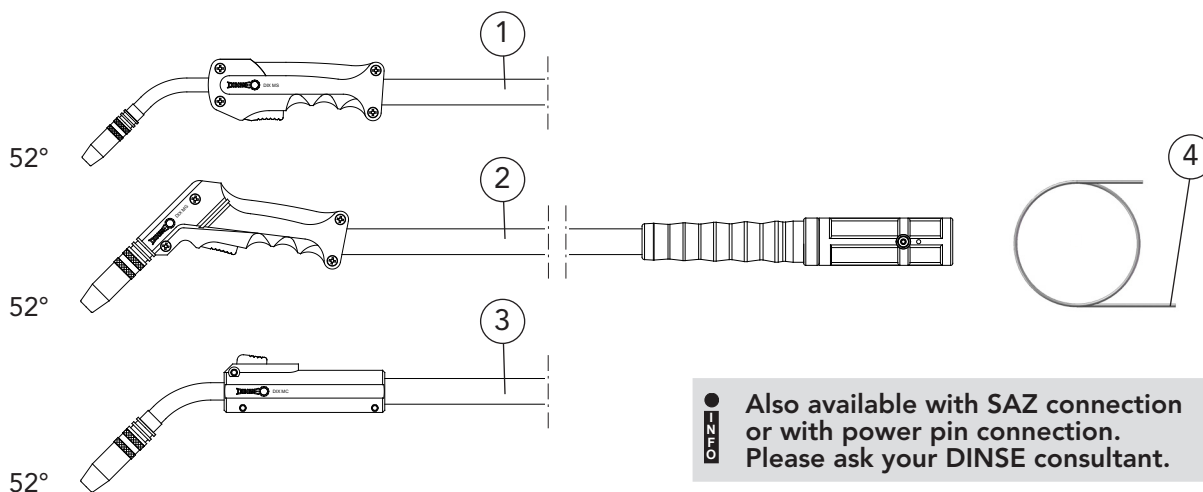

INFO Also available with SAZ connection or with power pin connection. Please ask your DINSE consultant.

Description	Dimension	Part name	Part number
1 Torch set	3.00 m	DIX MS 330-3	6202133130
Torch set	4.00 m	DIX MS 330-4	6202133140
2 Torch set	3.00 m	DIX MG 330-3	6202033130
Torch set	4.00 m	DIX MG 330-4	6202033140
3 Torch set	3.00 m	DIX MC 330-3	6202333130
Torch set	4.00 m	DIX MC 330-4	6202333140
4 Liner	ø 1.8 mm/3.5 m	DIX DS 4/1.8-3.5	613000235
Liner	ø 1.8 mm/4.5 m	DIX DS 4/1.8-4.5	613000245

Hint:

Other liners, capillary liners and service tools you will find in chapter tools and accessories.